

DATASHEET

MIVERA



WHAT IS BAMBOO?

Bamboo is fast-growing grass

It grows in 2-4 months and reaches full maturity in 6 years, compared to an oak tree that can take decades.

Full growth can be up to 80 ft high (approx. 10 cubicles high).



Comparable to MDF

Density/Weight:
650-700kg / m³
which is similar to
MDF

It has a higher tensile strength than cold-rolled steel

Because of its flexibility and ability to bend under pressure, bamboo is an extremely strong material.

Because of its fast-growing nature, it is far more sustainable than wood.

KEY FEATURES

- 01 Soft close doors on fall-to-close hinges used to maintain flush appearance
- 02 Can be stained & lacquered to any colour requirement
- 03 44mm solid core doors with 30mm divisions
- 04 Solid stainless steel ironmongery, available in a range of colours
- 05 Full height and made to measure
- 06 Versatile - can be installed in conjunction with dividing stud partition walls



MIVERA

Specifications

DOORS / OVER-DOOR PANELS & PILASTERS

Solid 5-ply material: 44mm high grade bamboo ply material.

Edge treatment: Rebated vertical edges. Above-door-panel option available on request.

Various stain and lacquer options available.

DIVISIONS

Solid 3-ply material w. natural finish: high grade bamboo ply.

Various stain and lacquer options available.

FIXING

Division to rear wall: Aluminium T-section fixed into pre-grooved division.

Division to pilaster: Concealed high-strength mechanical fixings.

Division/pilaster to floor & ceiling: Aluminium powder coated channel secured to floor. Division is pre-grooved and placed over the channel, raising it by 20mm and preventing contact with mopping water.

End Pilaster to wall: Fully adjustable aluminium shadow detail.

IRONMONGERY

Hinges: Solid stainless steel Butt hinges (fall to close)

Indicator bolt: Solid stainless steel mortise lock with lever operated turn action.

Damper: Hidden hydraulic soft close mechanism to all doors.

Internal fixings: Buffered coat hooks in stainless steel.

External fixings: Stainless steel pull handle to outward opening doors.

Tectus concealed hinges and/or ironmongery to be PVD coated in range of colours available on request.

SIZE

Overall height: To suit ceiling heights up to 3000mm


Division (h x w): To suit ceiling height x 1500mm

Door: (h x w): To suit ceiling height x site dimensions

Centre pilasters (h x w): To suit ceiling height x site dimensions

End pilaster (h x w): To suit ceiling height x site dimensions (min. width 100mm)



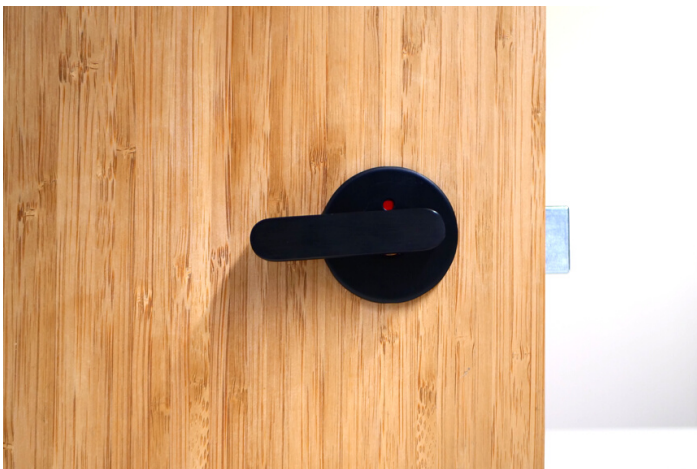

020 3657 7615



inspired@maxwoodwashrooms.com



www.maxwoodwashrooms.com



Maxwood Washrooms
121-131 Rosebery Avenue
London
EC1R 4RF

GET IN TOUCH