



DATASHEET

OPEX BENCHING



KEY FEATURES

- Wide range of configurations including freestanding island benches, cantilevered benching and wall-to-floor-fixed benching
- Made to measure gives complete layout flexibility
- Can be integrated with Maxwood lockers ranges
- Bench slats provided in solid grade laminate and lacquered ash or oak hardwood other timber species available on request
- Highly durable epoxy powder coated mild steel frames
- Option for shoe trays, backrests and pegrails









OPEX BENCHING

Specifications

FRAME

Material: Manufactured from 40mm x 40mm mild steel section.

Colour/Finish: Frame is zinc-plated and then epoxy powder-coated in choice of 10 colours from Maxwood selector.

Fixing: Adjustable feet with concealed floor fix.





LATH TYPE / COLOUR

25mm ash or oak hardwood laths with two coats of high performance water-borne lacquer.

Nominal height from FFL to top of laths is 450mm.

TYPES

Floor mounted perimeter benching (can be fixed to both wall and floor or just to the floor)

Cantilever perimeter benching (dependent on strength of wall build-up)

Island benching (free standing)

OPTIONAL ENHANCEMENTS


Timber pegrail with coat hooks in matching powder coated finish

Braked castors - for mobile benches

Shoe tray or footbar

Single or double tier shoe baskets

 $20 \mathrm{mm}$ high pressure laminate under-panel fixed to bench legs, to conceal bench support framework.

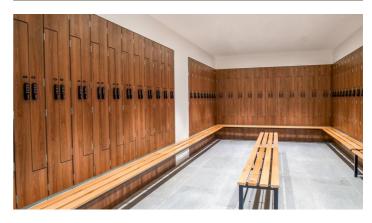





AND NOT ONLY THAT,


WE'VE GONE GREEN.










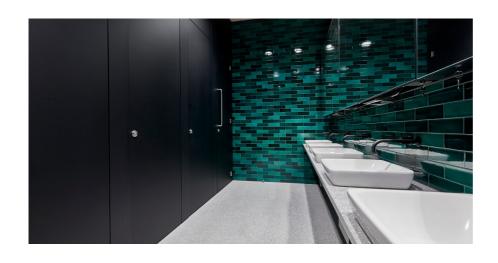





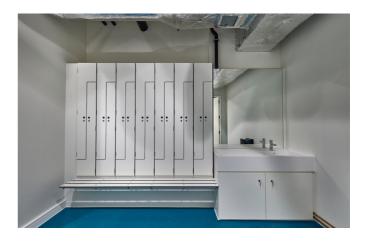





020 3657 7615



inspired@maxwoodwashrooms.com



www.maxwoodwashrooms.com



Maxwood Washrooms 121-131 Rosebery Avenue London EC1R 4RF

GET IN TOUCH

